



S52200 LifePo4 Battery

51.2V/200Ah/10.24KWh

Stack-mounted



Cycle life

>6000 Cycles @ 90%DOD



Consistency of battery cells

20 Years life span
Settable charging voltage



Intelligent BMS

Wider compatibility;



Scalable: paralleled 32 set

S Battery: 10.24kWh - 327.68kWh



Compact Design and Safety Protection




Touch screen

Set communication protocol and DIP
View battery information



Web

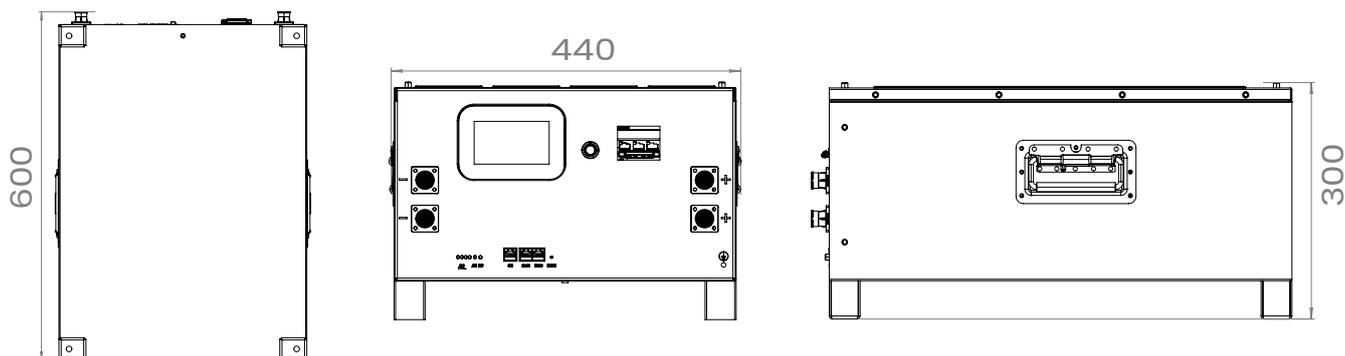

Model		S52200	
Module Type	LFP 10.24kWh / LV		
Nominal Voltage	51.2V		
Operating Voltage Range	44.8~58.4V		
Nominal Capacity	200Ah		
Nominal Energy (at 25°C)	10.24kWh		
DOD	90%		
Nominal Charge/Discharge Current	100A		
Max Charge/Discharge Current	200A		
Charge Temperature	0~55°C		
Discharge Temperature	-10~50°C		
Relative Humidity	5% - 95%		
Communication Interface	CAN / RS485		
Enclosure Protection Rating	IP 52		
Cooling Type	Natural cooling		
Cycle Life	≥6000		
Warranty	10 years		
Life Span	20+ Years (25°C)		
Max. Pieces of Parallel	32		
Dimension (L*W*H)	600*440*310mm		
Weight	80.9kg		
Certificates	IEC61000/IEC62619/CE/CB/UN38.3/MSDS		

<p>20'GP</p> <p>160 PIECES CONTAINER</p>	<p>40'HG</p> <p>260 PIECES CONTAINER</p>
--	--

Packing Configuration

Packing	Carton	
Dimension (L*W*H)	667*482*459mm	
Gross Weight (kg)	93.7kg	
Pieces per Pallet	10	
Container	20'GP	40'HQ
Pallets per Container	16	20
Pieces per Container	160	260